


# T3864L (pull type)

## DRAWING (mm)



## PHOTO

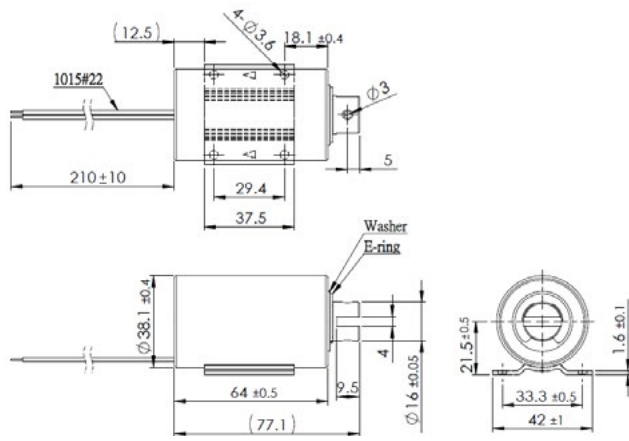

## MODEL NO. DESIGNATION


T3864L - VOLTAGE  
Example: T3864L-12V

SOLENOID DATA				
Duty cycle / ED (%) ▶	Continuous (100%)	Intermittent (50%)	Intermittent (25%)	Intermittent (10%)
Watts @ 20°C ▶	16.8	33.6	67.2	168
Maximum time in energized state (in seconds) ▶	∞	420	100	25
Part ▼	Resistance (20°C) ± 10% (Ω) ▼	DC Volts (V) ▼		
T3864L-06V	2.1	6	8.5	12
T3864L-12V	8.5	12	17	24
T3864L-24V	34	24	34	48

SOLENOID FEATURES AND STANDARD DATA		
	STANDARD	CUSTOMIZATION OPTIONS
Type	Pull type DC solenoid	Push type DC solenoid
Cable	Flying wire 230mm	Length, type and connector
Voltage	6 to 24 VDC @ 100% ED	Other voltages upon request
Life time	At least 500.000 single strokes	
Plunger material	Carbon steel 12L14	
Protection class	IP50	
Insulation grade	B	
Operating temperature	-5°C ... +40°C	
Manufacturing quality standards	ISO9001:2008, ISO/TS 16949:2002	
RoHS compliance	Yes	
CE approval	No	
UL approval	No	

ADDITIONAL DATA	
Return spring	No
Weight	497g

## PLUNGER PROFILE



## DIAGRAM

